




4RNWC-IIA OSC

APPLICATIONS:
2 SIDED
CLEANING

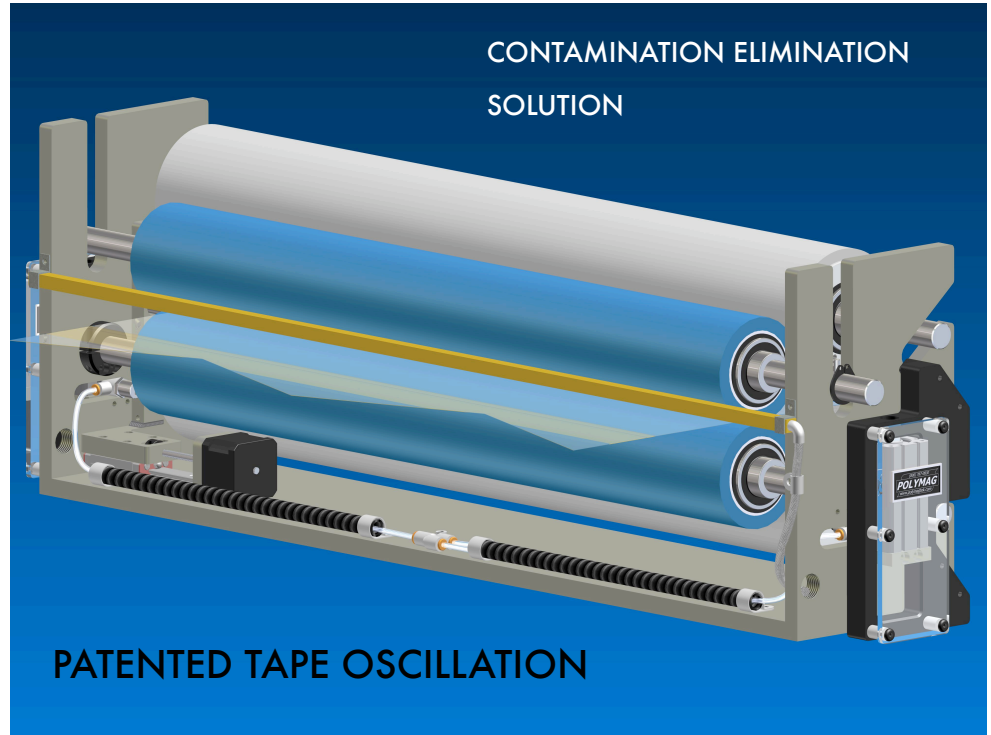


FEATURES:

- SIMPLE RUGGED INDUSTRIAL DESIGN
- 2 SIDED GRAVITY NIP
- 3.0" O.D. CONTACT CLEANING ROLLS
- PNEUMATIC CYLINDERS TO SEPARATE ROLLS WHEN MACHINE STOPS
- 2" OSCILLATION FEATURE FOR SLIT-EDGE CONTAMINATION - EXTENDS TAPE USEFULNESS BY 16X
- SHAFTED TAPE MOUNTING STYLE
- TOP TAPE CHANGE ACCESS
- NICKEL - PLATED STEEL CONSTRUCTION
- STATIC ELIMINATION
- ALTERED DESIGNS AVAILABLE

PROCESS PARAMETERS:

- MAXIMUM SPEED 700 FPM
- MINIMUM WIDTH 2" MAXIMUM 40"
- NO TAPE CHANGE ON THE FLY
- HORIZONTAL WEB DIRECTION

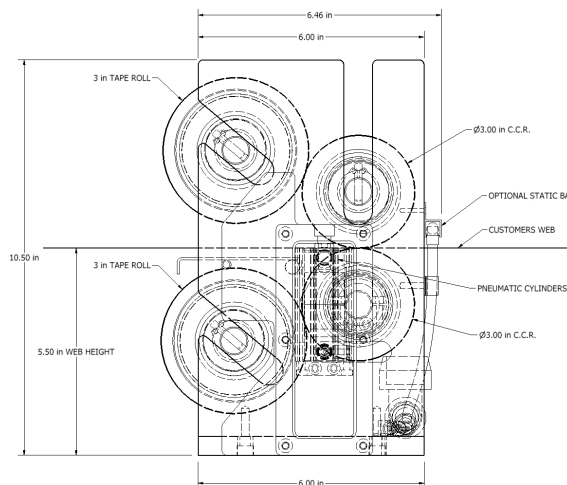

OPTIONS:

- INFEEED IDLE ROLLER

POLYMAG TEK
WWW.POLYMAGTEK.COM

1/800-787-0830
FAX: 585/235-8395
215 TREMONT ST
ROCHESTER, NY 14608