4RNWC-IIA

APPLICATIONS:

2 SIDED CLEANING

POLYMAG®

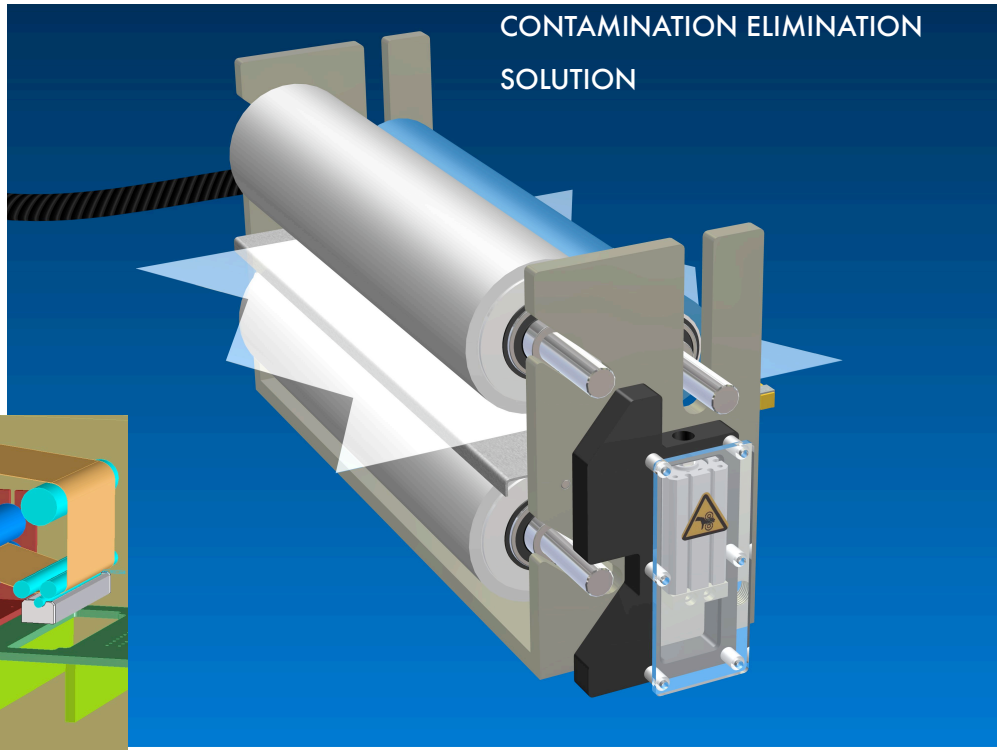

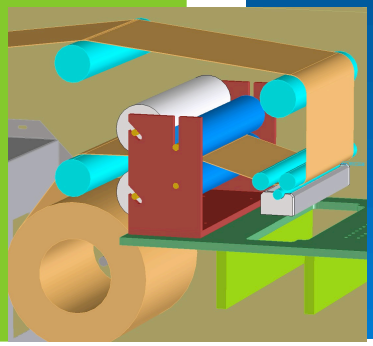

FEATURES:

- 2 SIDED GRAVITY NIP-SIMPLE RUGGED DESIGN
- 3.0" O.D. CONTACT CLEANING ROLLS
- PNEUMATIC CYLINDERS TO SEPARATE ROLLS WHEN MACHINE STOPS
- SHAFTED TAPE MOUNTING STYLE
- TOP TAPE CHANGE ACCESS
- NICKEL PLATED STEEL CON-STRUCTION
- CAN BE DESIGNED FOR A SOLVENT ENVIRONMENT
- ALTERED DESIGNS AVAILABLE

PROCESS PARAMETERS:

- MAXIMUM SPEED 700 FPM
- MINIMUM WIDTH 2" MAXIMUM 40"
- NO TAPE CHANGE ON THE FLY
- HORIZONTAL WEB DIRECTION

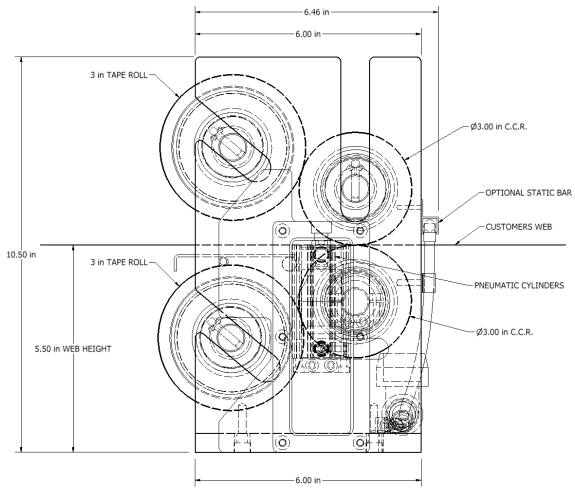

OPTIONS:

- STATIC BARS
- INFEED IDLE ROLLER

POLYMAG TEK
WWW.POLYMAGTEK.COM
1/800-787-0830
FAX: 585/235-8395
215 TREMONT ST
ROCHESTER, NY 14608