




APPLICATIONS:

4RWC

2 SIDED
CLEANING

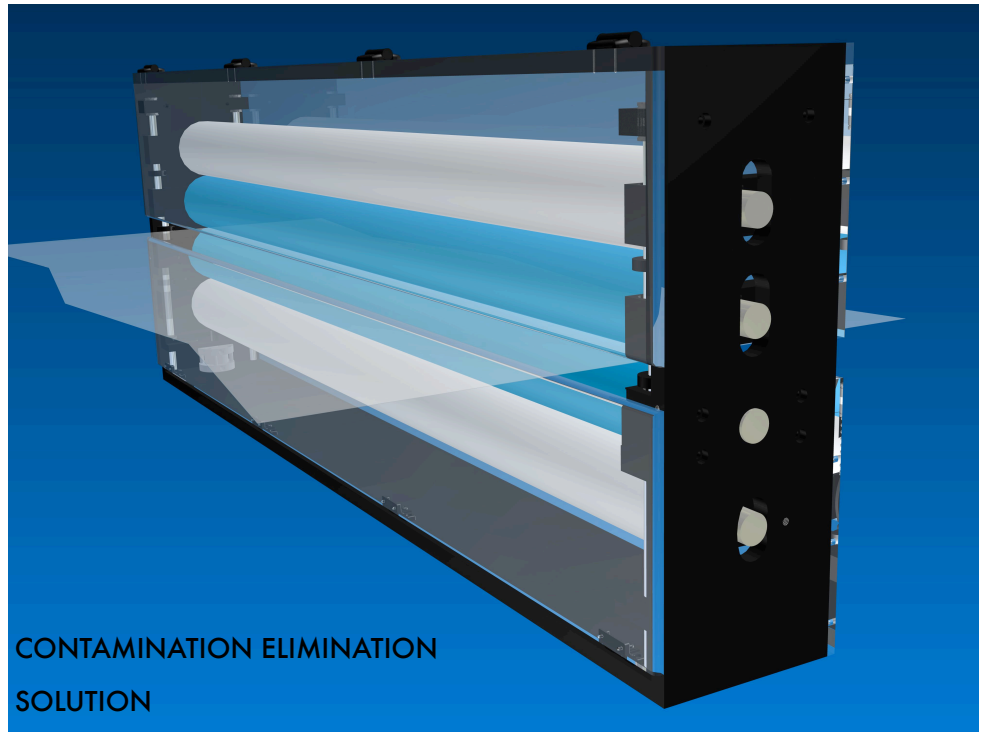

FEATURES:


- 2 SIDED NIP-SIMPLE RUGGED DESIGN
- 3.75" O.D. CONTACT CLEANING ROLLS
- PNEUMATIC CYLINDERS TO SEPARATE ROLLS WHEN MACHINE STOPS
- SPRING GUDGEON TAPE MOUNTING STYLE
- SIDE TAPE CHANGE ACCESS
- COATED ALUMINUM CONSTRUCTION
- CAN BE DESIGNED FOR A SOLVENT ENVIRONMENT
- ALTERED DESIGNS AVAILABLE

PROCESS PARAMETERS:

- MAXIMUM SPEED 700 FPM
- MINIMUM WIDTH 12" MAXIMUM 60"

OPTIONS:

- STATIC BARS
- INFEED IDLE ROLLS

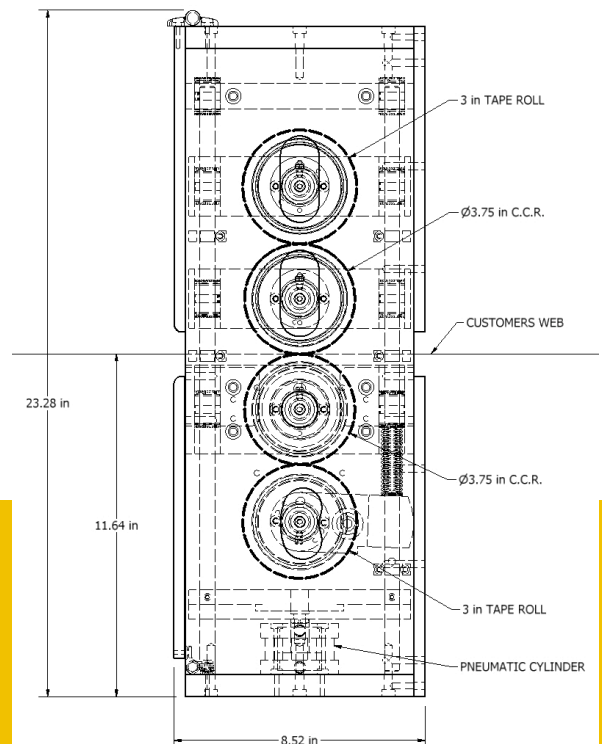

POLYMAG TEK
WWW.POLYMAGTEK.COM
 1/800-787-0830
 FAX: 585/235-8395
 215 TREMONT ST
 ROCHESTER, NY 14608

