

STATIC BARS



BR2200

BR2200 Shockless Rectangular Static Bar


Contact and separation between two surfaces creates static electricity, which can often cause materials like paper, plastic, textiles and other non-conductive materials to randomly attract to or repel from themselves or their surroundings. In a manufacturing environment this causes process problems which include jams, clogs, mis-feeds, poor stacking, reduced transport speeds, shocks to operators, fires, explosions, and a variety of contamination related problems.

The BR2200 is a "shockless" static neutralizing bar designed to help you control these troublesome and costly problems by neutralizing the static electricity that causes them.

END VIEW (Below)

Adjustable Mo
supplied)

imum mounting flexibility (two

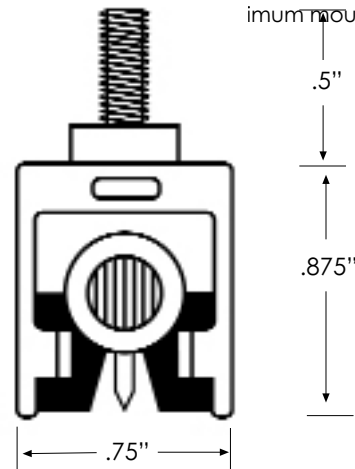

TECHNICAL DATA

- Round:** - - - - .75" X .875 diameter
- Overall length:** - - - - 3" to 144"
- Ionizing point spacing:** - - .75" on center
- Optimum Range:** - - - - .75" to 3"
- Mounting:** - - - - Adjustable rear mounting studs
8-32 x .5"
- Certification:** - - - - UL; CE
- High Voltage Cable:** - - 25KVDC, 105C, UL VW-1.
Standard length 72" alpha shielded cable. Terminated in
a factory installed spring loaded connector to mate with
TSN 70 or 75 or comparable power supply.



15 Adams Street Burlington, MA 01803 Tel: 781.229.7799 Fax: 781.229.4555