

Dual Offset Tape Roll, Wide Web Cleaner

ContactClean™ Web by Polymag® Tek, Inc.



Robust, innovative and configurable, Polymag® Tek's Dual Offset Tape Roll, Wide Web Contact Cleaning System provides two-sided cleaning for webs wider than 60" (1,524 mm) and up to 118" (3,000 mm), at speeds up to 800 fpm. This system utilizes two sets of overlapping tape rolls to remove contaminants from the two Polymag® Tek Blue-S™ Contact Cleaning Rolls' (CCRs) surfaces. Drawer slides that exit at the end of the machine provide safe, easy, "on-the-fly" tape changes outside of the web path.

Applications

- 2-sided cleaning
- "Stop & Go" processes or "Continual Run" processes
- Single-nip - up to 96.9% efficiency*
- Paper, film and foil substrates

Features

- 2-sided web cleaning
- Overlapped, adhesive tape rolls eliminate the seams from butt-end tape systems
- Rugged, sturdy drawer slides
- Tape removal outside of the web-path
- Shaftless tape roll mounting style

- Painted or nickel-plated steel construction
- In-feed and exit side active static elimination
- Altered designs available


Process Parameters

- Maximum speed 800 fpm (245 mpm)
- Web widths up to 118" (3,000 mm)
- Continuous cleaning operation

Options

- In-feed and/or exit idler rolls
- Oscillation
- Guarding

* Based upon results found in the Polymag® Tek "Dirt Report"

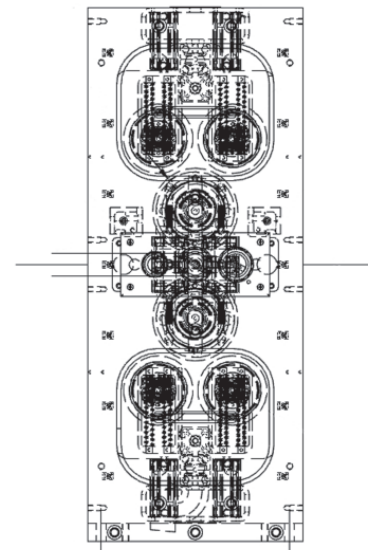

 **PolymagTek**
INCORPORATED

www.polymagtek.com

Phone: 1.800.787.0830 • Fax: 585.235.8395
215 Tremont Street, Rochester, NY 14608